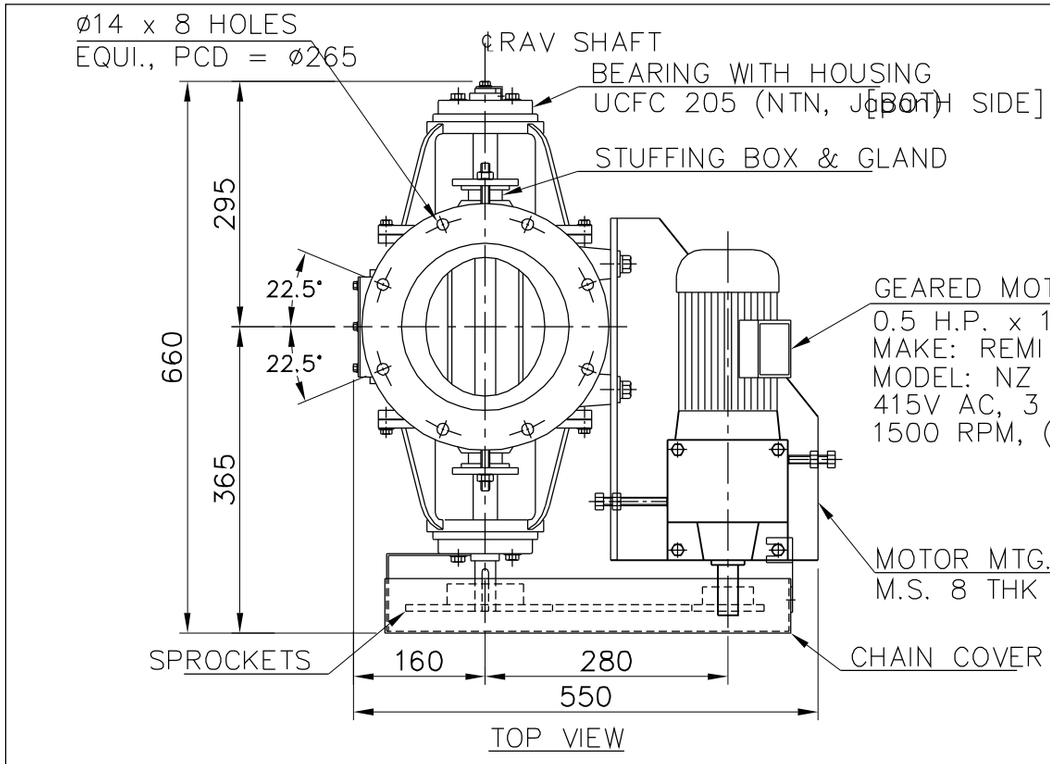

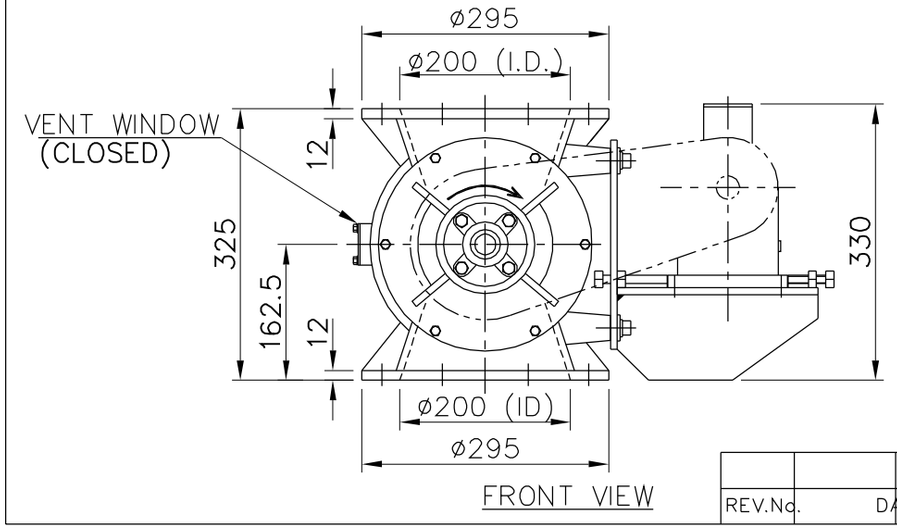

NOTES:

1. ALL DIMENSIONS IN mm
2. M.O.C.: CAST IRON
3. ROTOR: CAST IRON, 6 VANE, ADJ. OHNS TIP
4. SHAFT: EN8, GROUND & HARDENED
5. DISCHARGE CAPACITY: 450 KG.@ 5 RPM
6. DRIVE: 0.5 HP x 31 RPM GEARED MOTOR (R
7. CLEARANCE: 0.15–0.2 mm RADIAL
   & 0.2–0.3 mm AXIAL
8. ROTOR RPM: ~5 RPM
9. DRIVE SPROCKET : 1/2" PITCH, TEETH
10. DRIVEN SPROCKET: 1/2" PITCH, TEETH
11. GLAND PACKING MATL.: GRAPHITE RINGS

CLIENT'S REF.:	Dtd.:	QTY.: 3 Nos.

	Name	Date
DRN	SSB	29/06/05
CHKD		
APVD		

SCALE N.T.S.

DWG. No. : X'1371–01

FILE: Paramount powder

X'CALIBUR AUTOMATION
26, 'VIDYESH', SENADUTTA PETH,
PUNE – 411 030. (I N D I A)

Title:
G.A. DRAWING OF 8" RAV WITH DRIVE (Model : RVZ 201C)
[for POWDER]

CLIENT: PARAMOUNT POWDER PVT. LTD.

REV.No.	DATE	BY	DESCRIPTION
			REVISION

PROJECT

PDF created with pdfFactory Pro trial version www.pdffactory.com